

# Wheel Cardz™ by Brightz

## Instructions

©Copyright Brightz, Ltd. 2019  
Patent Pending • All rights reserved

### Step 1 – Placement


Select a position on the bike where you want to place Wheel Cardz™. See diagram for recommended placement.



Loosen the screw on the clamp to open it. Position the clamp around the bike frame so that the clip mouth is facing the wheel spokes and tighten the screw.

### Step 2 – Insert Card

Insert any card into the clip, making sure the card is secured in both sets of rubber teeth. Adjust the card and clamp so that about 1/4" inch of the card is in between the spokes.

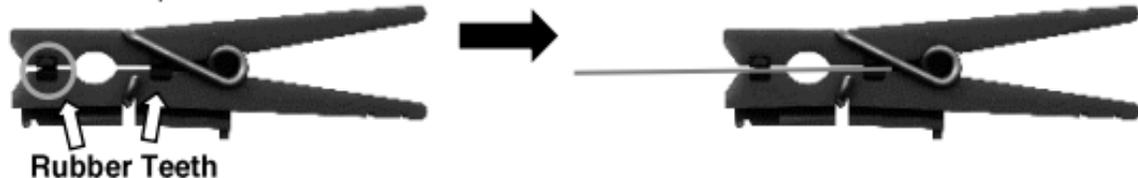

**Optional:**

### **Step 3 – Remove Clip from Clamp**

The clip can be separated from the clamp for easy removal to avoid theft.

- To remove the clip, pull the tab outwards and slide to release.
- To replace the clip, slide into place until the tab clicks.



-  - Do not operate the product while the bike is being pedaled or any part of the bicycle is in motion.
- Do not mount Wheel Cardz™ on any moving part of the bicycle (e.g., gears, pedals, chain, brakes).
- This product is designed for use on bicycles only. Improper installation of product will interfere with bicycle operation.

**Brightz, Ltd.**

8000 Yankee Road, Suite 225, Ottawa Lake, MI 49267

Email: [info@brightz-ltd.com](mailto:info@brightz-ltd.com)

Visit us at [www.brightz-ltd.com](http://www.brightz-ltd.com) for more fun products!